


Technical specifications

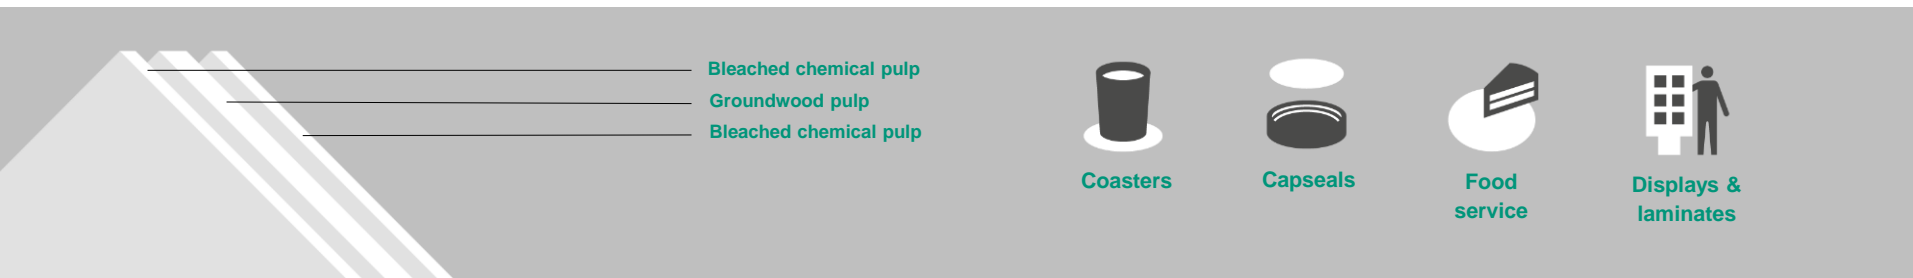

Typical technical values for PankaDisc

| Property / Unit | Tolerance | | | | | | | | | | Standards |
|---------------------------------------|-----------|-------|-------|-------|-------|------|------|------|-------|-------|------------|
| Basic Weight, lb/1000 ft ² | ±4% | 56.3* | 62.5* | 70.7* | 76.8* | 79.9 | 88.1 | 98.3 | 118.8 | 129.0 | ISO 536 |
| Caliper, pts | ±5% | 24.4 | 27.6 | 31.5 | 33.5 | 35.4 | 39.4 | 45.3 | 55.1 | 61.0 | ISO 534 |
| Surface Smoothness, Bendtsen, ml/min | | 1500 | 1500 | 1600 | 1600 | 1600 | 1800 | 2000 | 2000 | 2000 | ISO 8791-2 |

* Grammage produced upon special request, minimum production volume 20 tonnes

Tailor-made substances can be produced upon request, minimum production volume 20 tonnes

Properties not related to grammage

| Property / Unit | Tolerance | Values | Standards |
|--|-----------|--------|------------|
| Moisture, % | ±1.5 | 8.0 | ISO 287 |
| ISO Brightness C/2 ^o , % | ±1.5 | 75 | ISO 2470-1 |
| Scott Bond, Lbfft/1000 in ² | >43 | 43 | TAPPI 569 |
| Absorbency top, s | | <30 | |
| Absorbency reverse, s | | <30 | |

➤ **For more information contact your local sales representatives or**

Pankakoski Mill Oy
 Ruukintie 2
 FI-81750 Pankakoski
 Finland
 Tel. +358 (0) 10 480 4600
 Fax. +358 (0) 10 480 4701

www.pankaboard.com