


Technical specifications

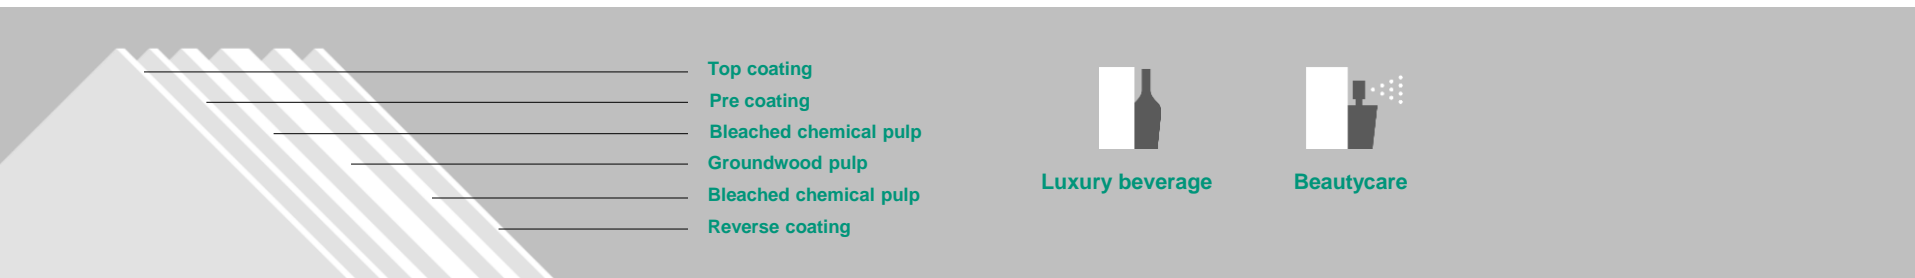

Typical technical values for PankaLux

Property / Unit	Tolerance									Standards
Basic Weight, lb/1000 ft ²	±4%	73.7	78.9	84.0	89.1	94.2	99.3	104.5	114.7	ISO 536
Caliper, pts	±5%	22.8	25.2	27.2	29.1	31.5	33.7	35.8	39.4	ISO 534
Moisture, %	±1.5	8.5	9.0	9.0	9.0	9.0	9.5	9.5	9.5	ISO 287
Bending moment Taber 15° MD, gcm	-15%	407	477	568	666	764	875	995	1262	ISO 2493
Bending moment Taber 15° CD, gcm	-15%	185	217	564	272	348	398	453	56.3	

Properties not related to grammage

Property / Unit	Tolerance	Values	Standards
ISO Brightness C/2°, %, top	±1.5	85	ISO 2470-1
ISO Brightness C/2°, %, reverse	±1.5	80	ISO 2470-1
Colour CIELAB L * C/2°, top		93.5	ISO 5631-1
Colour CIELAB a * C/2°, top		0.7	ISO 5631-1
Colour CIELAB b * C/2°, top		0.5	ISO 5631-1
Surface Smoothness, PPS 10, µm	±0.3	1.0	ISO 8791-4
Smoothness Bendtsen, top, ml/min		40	ISO 7891-2
Gloss 75°, %	>40	40	ISO 8254-1
Scott Bond, Lbfft/1000 in ²	>53	53	TAPPI 569

➤ **For more information contact your local sales representatives or**

Pankakoski Mill Oy
 Ruukintie 2
 FI-81750 Pankakoski
 Finland
 Tel. +358 (0) 10 480 4600
 Fax. +358 (0) 10 480 4701

www.pankaboard.com